

Belshaw Adamatic

BAP-2-PT Series Proofer, 2-Door, Roll-In, Pass-Through

Construction

- Stainless steel exterior with 300 Series s/s interior and aluminized steel top
- Foamed insulation in walls ceilings and doors
- Modular wall and ceiling panels with cam lock construction
- Heavy duty welded s/s hinges
- Rapid responding air-wash heat and humidity system
- Depth up to 120", capacity up to 14 racks
- 208/240 VAC, either 1 or 3-phase, field convertible
- 4-door pass-through design

Operation

- 70°-120° F proofing range
- 50 - 99% humidity range
- Non-submerged calrod type heaters
- Interior bumpers protect interior walls from damage
- Lighted interior

Controls

- Digital set Temperature, Humidity, Time
- PID type controls for rapid accurate response without overshoot
- All digital controls mounted in the door at eye-level
- Large LED display

Options

- Stainless steel floor
- Prison package

Model/Rack Capacity*

Model/Depth	Side Load 28.4"Wx18.0"D	End Load 26.0"Wx20.4"D	Double 28.4"Wx36.0"D
BAP-2-30-PT	2 Racks	3 Racks	None
BAP-2-40-PT	4 Racks	3 Racks	2 Racks
BAP-2-50-PT	5 Racks	5 Racks	2 Racks
BAP-2-60-PT	6 Racks	6 Racks	3 Racks
BAP-2-70-PT	7 Racks	7 Racks	3 Racks
BAP-2-80-PT	9 Racks	8 Racks	4 Racks
BAP-2-90-PT	10 Racks	10 Racks	5 Racks
BAP-2-100-PT	11 Racks	10 Racks	5 Racks
BAP-2-110-PT	12 Racks	13 Racks	5 Racks
BAP-2-120-PT	14 Racks	13 Racks	7 Racks

*Racks may be snug at maximum capacity. For details of rack arrangement, see the Rack Capacity Guide at <http://www.belshaw-adamatic.com/specs/belshaw-adamatic-rack-capacity-guide.pdf>



BAP-2-40-PT Proofer

Short Bid Specification


Rack Proofer Model BAP-2-xxx-PT [insert 30 thru 120] shall be a 5 to 13.2 kW electrically heated, four door pass-through, roll-in rack unit with: quick responding air-wash heat / humidity system; modular cam lock panel construction with foamed insulation; all stainless steel interior, with protective cart bumpers; heavy-duty doors with magnetic seal/mechanical closure system and full width protective bar handle; simple computerized controls, door mounted at eye-level, with accurate digital temperature, humidity and time readouts; plus all the features listed and options checked.

Standard Product Warranty

One-Year Parts and Labor, USA and Canada.
(USA includes 50 states + DC unless specified)

Certifications



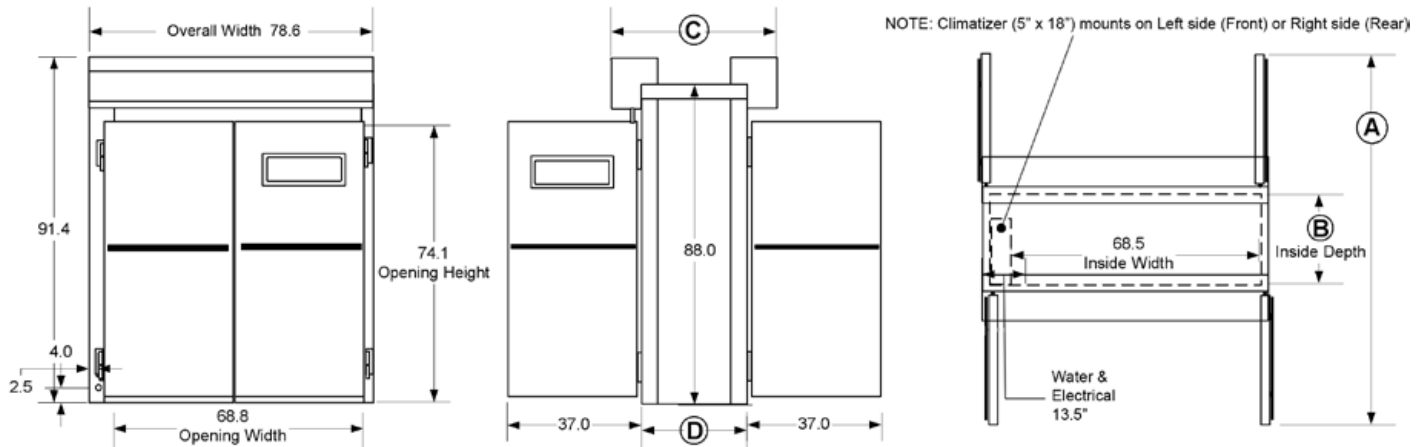

Dimensional Data

Freight Class=70

Model	Height		Width		Depth				Approx Weight (lbs)	
	Int	Ext	Int	Ext	"A"	"B"	"C"	"D"	Actual	Ship
BAP-2-30-PT	74.1"	91.4"	68.8"	78.8"	103"	26"	45.5"	29"	1100	1200
BAP-2-40-PT					113"	36"	55.5"	39"	1157	1282
BAP-2-50-PT					123"	46"	65.5"	49"	1329	1454
BAP-2-60-PT					133"	56"	75.5"	59"	1411	1536
BAP-2-70-PT					143"	66"	85.5"	69"	1538	1663
BAP-2-80-PT					153"	76"	95.5"	79"	1665	1790
BAP-2-90-PT					163"	86"	105.5"	89"	1424	1549
BAP-2-100-PT					173"	96"	115.5"	99"	2007	2051
BAP-2-110-PT					183"	106"	125.5"	109"	2178	2303
BAP-2-120-PT					193"	116"	135.5"	119"	2260	2385

Water Supply and Drainage Requirements

Model	Water Supply	Drainage
BAP-2-(30 thru 80)-PT	1/2" NPT .07 GPM @ 60 PSI	1/2" PVC; 110°F <1 GPM Max, Vented
BAP-2-(90 thru 120)-PT	1/2" NPT .14 GPM @ 60 PSI	

Electrical Requirements

Model	Voltage	Total kW	1-Phase	3-Phase
BAP-2-(30 thru 80)-PT	208 VAC	5 kW	24.0 A	13.8 A
	240 VAC	6.6 kW	27.5 A	15.8 A
BAP-2-(90 thru 120)-PT	208 VAC	10.2 kW	48.0 A	27.6 A
	240 VAC	13.2 kW	55 A	31.6 A

Installation Requirements

- Requires on-site installation
- KD shipment. When disassembled, can fit through 36" opening
- Consult factory for shipment fully assembled
- 208/240 VAC, either 1 or 3-phase, field convertible
- 1/2" NPT cold water connection
- 1/2" PVC vented drain connection
- This appliance is designed to operate at normal room temperatures; if installed next to an oven or other heat source allow a minimum clearance of 4" to prevent heat transfer.
- Clearance from combustibles is 0.0" sides and back
- 2" clearance on all sides (required for doors to open 90°)
- For install on non-porous surfaces only
- Electrical and water connections are made at the front header assembly. Control panel and electrical controls likewise at front only.
- Your local water conditions may damage your appliance. Failure to properly treat water may result in damage and may void your warranty. Ensure that your water supply meets these minimum water quality specifications:
 - Alkalinity: 22 ppm
 - Aluminum: 17 ppm
 - Calcium: 3.3 ppm
 - Free chlorine residual: 0.6 ppm
 - Magnesium: 0.65 ppm
 - PH range: 8.5 s.u.
 - Sodium: 8.5 ppm
 - Total Hardness: 11.9 ppm
- Consult your local water treatment company for proper water filtration system.